





Company Profile

CEA ELECTRIC CO.,LTD



CEA Electric Co.,Ltd., founded in 2008, is a company focusing on energy storage power supply and solutions, integrating product R & D, production and sales. It is rewarded as national green factory, national green supply chain enterprise, national "little giant company" (focus on a market niche and master key technologies with strong innovation capacity), national high–tech enterprise and national intellectual property advantage enterprise.

CEA is a global leader in the fields of photovoltaic energy storage integration and off-grid independent power supply systems. It provides energy storage products with stable performance and excellent quality and integrated after-sales services in remote areas or in the environment where mains electricity cannot be accessed, so as to provide customers with reliable living power guarantee.

The lithium iron phosphate battery portable outdoor energy storage power supply and household emergency energy storage power supply developed by CEA have obtained the certificates of ETL, TUV and PSE, etc. They have the characteristics of safety and reliability, ultra-long life span, multi-way charging, long battery life, and environmental protection.

We believe that CEA energy storage off-grid power supply system is one of the best programs to meet people's independent power supply needs, and it contributes to clean energy, low-carbon, environmental protection and realization of human sustainable development.






Certification

Portable Power Station







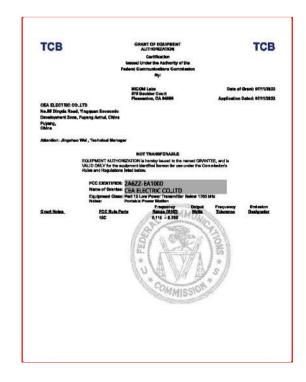

CEA Portable Power Station

















Portable Power Station

CEA power station has the following characteristics:

Long operating hours, long life time:

LiFePO4 battery cell, safe and reliable, high battery recycle times, long service life, excellent quality, multiple charging ways, small size and lightweight, convenient to take around.

Strict quality control:

Incoming quality control, sub-capacity, cell test, PCB test, semi-finished product test, aging test, finished product test, finished product inspection, QA sampling

Multiple use occasions, multiple devices compatible

Could be used as household back up energy, outdoor live broadcast energy, camping energy, night market energy. Support with MPPT solar board, built-in SEC technology and BMS, ensure the safety.

Smart operating control, smart LCD display.

Pure sine wave inverter, reliable output:

Smart protection includes: overcharge protection, low voltage protection, short circuit protection, over current protection, high and low temperature protection.

Application:

TV, Projector, Juicer, MINI Fridge, Rice cooker, Oven, Printer, Drone, Beauty lamp, Audio, Fan, Cutting machine, Electric drill, Camera, Camping lamp, CPAP etc.





Product







500W

1000W

Model		EE500-480WH-1YE	EE1000-960WH-1YE	EE1500-1280WH-1YE	
Color		Yellow/Green/Black	Yellow/Green/Black	Yellow/Green/Black	
Battery	y Capacity	480Wh(19.2V 25AH)	960Wh(19.2V 50AH)	1280Wh(25.6V 50AH)	
Rated	Power	500W	1000W	1500W	
Peak P	ower	1000W	2000W	3000W	
	Wall Charger	100W 20V 5A External Adapter	320W 40V 8A External Adapter	320W 40V 8A External Adapter	
Input	Solar Panel	100W(11~23V 5A)	320W(11~60V 10A) WITH MPPT	320W(11~60V 10A) WITH MPPT	
	AC Option	pur	2*sockets, british socket e sine wave 220V, 50Hz or 120V 60	Hz	
Output	DC	2 * 552	21 , 12V 10A 1 * cigarette ligh	ter, 12V 10A	
Output	USB-A	2x Independent 18W 5V3A 9V2A 12V1.5A	2x Independent 18W 5V3A 9V2A 12V1.5A	2x Independent 18W 5V3A 9V2A 12V1.5A	
	C1 Type-C	Single Discharge 30W	Single Discharge 30W 5V3A 9V3A 12V2.5A 15V2A	Single Discharge 30W 5V3A 9V3A 12V2.5A 15V2A	
	C2	5V3A 9V3A 12V2.5A 15V2A	Single Discharge 45W 5V3A 9V3A 12V2.5A 15V3A	Single Discharge 100W 5V3A 9V3A 12V3A 20V5A	
Wireles	ss Charger	1x 10W			
LED W	ork Light	1*2W			
Flashli	ght	1*2W			
Accessory		Power cord 1*48cm, Car charging wire 1*131cm		1cm	
Size(n	nm)	L298 x W220x H213	L378 x W265x H239	L378 x W265x H239	
Net w	eight	7.0 KG (15.43 LBS)	11.0 KG (24.25 LBS)	13.0 KG (28.66 LBS)	



Product







500W

1000W

Model		EE500-441WH-2YE	EE1000-1024WH-2YE	EE1500-1280WH-2YE
Color		Yellow/Green/Black	Yellow/Green/Black	Yellow/Green/Black
Batter	y Capacity	441Wh(19.2V 23AH)	1024Wh(25.6V 40AH)	1280Wh(51.2V 25AH)
Rated	Power	500W	1000W	1500W
Peak P	ower	1000W	2000W	3000W
	Wall Charger	153W 21.9V 7A External Charger	900W Bidirectional Inversion	900W Bidirectional Inversion
Input	Solar Panel	400W(10-40V 10A)	400W(10-40V 10A)	400W(10-40V 10A)
Output	AC Option		2*sockets, british socket 230V, 50Hz pure sine wave	
Output	USB-A		18W	
	Type-C	PD20W		
Wirele	ss Charger	1x 15W		
LED W	ork Light	1*2W		
Operating temperature range		-10-40°C		
Lifespan		support over 4000 cycles		
Size(mm)		L298 x W220x H213	L378 x W265x H239	L378 x W265x H239
Net w	veight veight	7.0 KG (15.43 LBS)	11.0 KG (24.25 LBS)	13.0 KG (28.66 LBS)



Product







Model		EH300-270WH-1YE	EH500-448WH-1YE	EH1000-768WH-1YE
Color		Yellow	Yellow	Yellow
Battery	y Capacity	270Wh	448Wh	768Wh
Rated	Power	300W	500W	1000W
Battery	у Туре		Lithium iron phosphate	
Input	Wall Charger	25.5V 4A External Adapter 100W	25.5V 7A External Adapter 178W	900W Bidirectional Inversion
πρατ	Solar Panel	16-50V 15A 300W		10-40V 10A 400W
Charging	Mains Electricity	About 3H	About 3H	About 1H
Time	Solar Panel	About 1.2H	About 2H	About 3.2H
Output	AC Option	Universal socket*1, 2	220V, 50Hz sine wave	Universal socket*2, 220V, 50Hz sine wave
σατρατ	USB	USB-A*1 PD18W USB-C*1 PD20W		
Operating Ambient Temperature Range			-10~40°C	
	nm)L*W*H	L230 x W185x H205	L250 x W185x H220	L300 x W205x H235
Net W	/eight	3.6 KG (7.94 LBS)	6.1 KG (13.45 LBS)	8.6 KG (18.96 LBS)
Gross	Weight	3.9 KG (8.60 LBS)	6.5 KG (14.33 LBS)	9.0 KG (19.84 LBS)



Product





Model		EH1500-1024WH-1YE	EH2000-1536WH-1YE
Color		Yellow	Yellow
Batter	y Capacity	1024Wh	1536Wh
Rated	Power	1500W	2000W
Batter	у Туре	Lithium iron	phosphate
la a de	Mains Electricity	900W Bidirectional Inversion	1500W Bidirectional Inversion
Input	Solar Panel	10-40V 10A 400W	
Charging	Mains Electricity	About 1.4H	About 1.2H
Time	Solar Panel	About 4.3H	About 6.4H
Output	AC Option	Universal socket*2, 220V, 50Hz sine wave	Universal socket*3, 220V, 50Hz sine wave
Output	USB	USB-A*1 PD18W USB-C*1 PD20W	
Operating Ambient Temperature Range		-10~40°C	
Size(mm)L*W*H		L340 x W206x H235	L390 x W225x H275
Net Weight		11.8 KG (26.01 LBS)	15.6 KG (34.4 LBS)
Gross Weight		12.5 KG (27.56. LBS)	16.2 KG (35.71 LBS)







Model	SPS 500-40	SPS 1000-100	
Color	Black		
Battery Capacity	480Wh	1200Wh	
Rated Power	500W	1000W	
Peak Power	1000W	2000W	
Input Wall Charger	146W 14.6V 10A Internal Charger	292W 14.6V 20A Internal Charger	
Charging Time	About 4.5H	About 5.0H	
Output — AC	3 * Sockets, 220V, 50Hz Pure Sine Wave	4 * Sockets , 220V, 50Hz Pure Sine Wave	
USB-A	5V 2.1A		
Ambient Temperature Range	-10~4	0 °C	
Accessory	Charging power cord 1	*100cm, Hexagon wrench *1	
Size(mm)	L350 x W300 x H275	L430 x W340 x H345	
Net weight	21.0 KGS (46.29 LBS)	41 KGS (90.39 LBS)	



Mobile Power Station





3000W

Model		EH3000-3072WH-1BK EH5000-5120WH-1BK	
Color		Bla	ck
Battery	/ Capacity	3072Wh(51.2V 60AH)	5120Wh(51.2V 100AH)
Rated	Power	3000W	5000W
Peak Power		6000W	10000W
AC Input	Wall Charger	AC 120V or 220V 1800W	
PV	Solar Panel	Max 2400W(12-150V 25A) with MPPT	
AC Ou	ıtput	120V or 220V	
Accessory		Power cord 1*48cm, Car charging wire	1*131cm, Anderson Port *1, Hexagon Wrench *1
Size(mm)		L900 x W450x H700	L900 x W450x H700
Net w	eight	82 KGS (180.78 LBS)	100 KGS (220.46 LBS)



Mobile Power Station



7000W (120V & 240V ALL IN ONE)

Model		EV7000-5120WH
Color		Black
Battery Capacity		5120Wh(51.2V 100AH)
Rated I	Power	7000W
Peak Power		14000W
AC Input	Wall Charger	AC 120V 1800W AC 240V 3600W
PV	Solar Panel	Max 2400W(12-150V 25A) with MPPT
EV Inpu	ıt	AC 240V 3600W
AC Out	put	15A*2 TT-30R*1, 6-50R*1(240V Split Phase)
Accessory		Power cord 1*48cm, Car charging wire 1*75cm, 30A plug *1, Hexagon Wrench *1
Size(mm)		L900 x W450 x H800
Net w	eight	104 KGS (229.2 LBS)

CEA Mobile Power Station

5KW 5120WH

Functional Parameters



CEA's mission is to provide solutions on human's requirement of power usage in an environmentally friendly and sustainable way, which does no harm to our planet. Our portable power station EA5000-5120WH-1YE, 5KW/5120WH is designed with LiFePO4 battery, which can replace 5 KW gasoline generator. It can be used in different occasions, but with less noise. Matching with solar board charging, it is an eco way to produce energy without pollution.



Mobile Power Station



10240WH

Model		EE3000-6144WH-1BK EE5000-10240WH-1BK		
Color		Black		
Battery Capacity		6144Wh	10240Wh	
Rated	Power	3000W	5000W	
Peak P	ower	6000W	10000W	
	Wall Charger	180	00W	
Input	Solar Panel	Max 3000W(120-450V 22A) with MPPT	Max 4500W(120-450V 22A) with MPPT	
	AC	4 socket, Universal Plug 10A*3 L6-30R*1		
	DC	2 * 5521 , 12V 10A	1 * cigarette lighter, 12V 10A	
Output	USB-A	4*18W : 5\	v3A 9V2A 12V1.5A	
	C1 Type-C —	100W: 5V3A 9V3	SA 12V3A 15V3A 20V5A	
	C2	100W: 5V3A 9V3	SA 12V3A 15V3A 20V5A	
Accessory		Power cord 1*48cm, Car charging wire	1*131cm, Anderson Port *1, Hexagon Wrench *1	
Size(mm)		L856 x W710x H1105	L856 x W710x H1105	
Net weight		140 KGS (308.6 LBS)	165 KGS (363.8 LBS)	




Expandability

3kW and 5kW portable power station is battery expandable.

We have choice on battery expansion either single battery on top of portable power station or have battery modules loaded on separate trolley.

3kW battery module is 3072WH each piece,each trolley could load 3 modules,max capacity up to 18432WH. 5kW battery module is 5120WH each piece,each trolley could load 3 modules,max capacity up to 30720WH. Trolley is equipped with 2 universal wheel and 2 main wheel,3 layers frame is removable and could be hung up with a ring on top frame.And it is also equipped with foldable handle,easy to move around.Add up to 6 expansion batteries for a total of 30720Wh of battery storage.

Capacity Expansion System

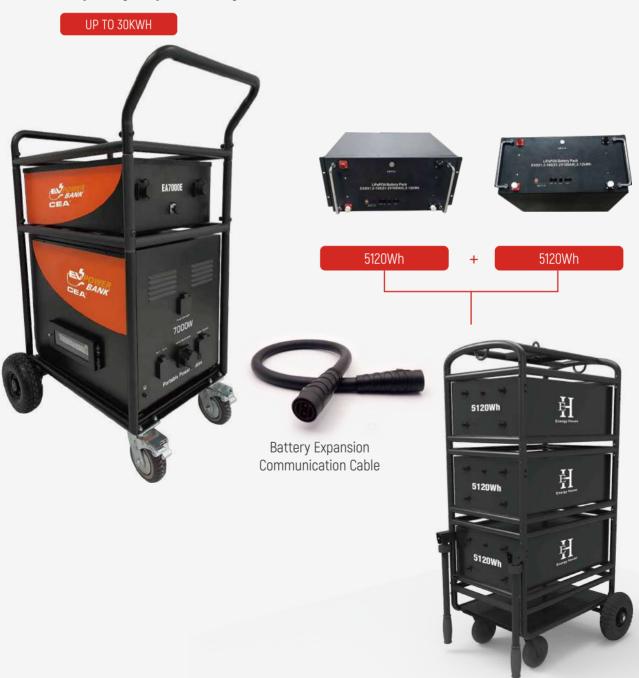



Battery System





Model	EE-BA-9216WH	EE-BA-15360WH
Color	Bla	nck
Battery Capacity	9216Wh	15360Wh
Communication Interface	RS	6485
Size(mm)	L792 x W	/710x H1228
Net weight	160 KGS (352.7 LBS)	190 KGS (418.8 LBS)







Model	EE10000-20KWH-1GY	EE10000-40KWH-1GY	
Color	Gre	гу	
Battery Capacity	20KWh	40KWh	
AC output voltage (nominal)	120V	/ 240V	
Grid frequency	50/	60Hz	
Total Energy	20.48KWh	40.96KWh	
Usable energy	19.6KWh	39.5KWh	
Real power, max continous	10	10kw	
Real power, peak (10S, off-grid/standby)	20000\	20000VA (1-2S)	
Apparent power, maximum continous	1000	10000VA	
Apparent power, peak (10S, off-grid/backup)	20000\	/A (1-2S)	
Warranty	5 \	/EARS	
Operating temperature	-10-4	-10-45	
Operating humidity(RH)	≤8	≤80%	
Size(mm)	L793 x W663x H970	L793 x W663x H1500	
Weight	250 KGS (551.2 LBS)	430 KGS (948 LBS)	



Mobile Power Bank



EV-60A-65D

Product name	EV-60A-65D
Charging voltage	DC CHARGER/AC380V
Charging standard	CCS1/CCS2/CHAdeMO/GBT//Tesla
Type of Battery	LiFePO4
Nominal capacity	65KWh
Charge rate	0.5C
Discharge rate	1C
Battery voltage	614.4V
Depth of discharge	80%
Charge Cycles	6000
Cell type	LiFePO4
Pack voltage	614.4V
Rated voltage	3.2V
Rated current	105A
Cooling method	LIQUID COOLANT
IP level	IP54
Isolation method	Direct Detection
Rated Power	60 KW
Output Voltage	DC200V-750V
Output Current	0-150A
Charging mode	60KW DC Fast Charging
Safety Protections	Overvoltage Vercurrent Low-voltage ESD Lighting Overcharge
	Overload、Fire、Overheat、Waterproof、Leakage and Chip Protection
Communication Protocol	OCPP
Networking method	4G Module
Networking protocol	OCPP Network
Charging GUN	CCS1/CCS2/CHAdeMO/GBT//Tesla
Cable Length	7 Meters(Customizable)
HMI	7-inch touch screen (charging station)
Language	English(Customizable)
Dimension L*W*H/mm	1500*965*1050
Weight/kG	900KG
Operating temperature/°C	-10°C-60°C
Altitude/m	2000m
Noise/dB	≤60dB
Relative humidity/RH	5% \sim 95%RH, non-condensing
Certificate	CE



Mobile Power Bank



EV-120A-161DM

Product name	EV-120A-161DM
Charging voltage	DC/AC380V
Charging standard	CCS1/CCS2/CHAdeMO/GBT//Tesla
Type of Battery	LiFePO4
Nominal capacity	161KWh
Charge rate	0.5C
Discharge rate	1C
Battery voltage	512V
Depth of discharge	80%
Charge Cycles	6000
Cell type	LiFePO4
Pack voltage	512V
Rated voltage	3.2V
Rated current	315A
Cooling method	LIQUID COOLANT
IP level	IP54
Isolation method	DIRECT INSULATION
Rated Power	120 KW
Output Voltage	DC200V-750V
Output Current	0-250A
Charging mode	Automatic full, fixed power, fixed amount, fixed time
Safety Protections	Overvoltage, Overcurrent, Low-voltage, ESD, Lighting, Overcharge,
	Overload, Fire, Overheat, Waterproof, Leakage and Chip Protection
Payment method	OCPP
Networking method	4G Module
Networking protocol	OCPP Network
Charging GUN	CCS1/CCS2/CHAdeMO/GBT//Tesla
Cable Length	7 Meters(Customizable)
НМІ	7-inch touch screen (charging station)
Language	English(Customizable)
Dimension L*W*H/mm	2000*1230*1087
Weight/kG	1500KG
Operating temperature/°C	-10°C-60°C
Altitude/m	2000m
Noise/dB	≤60dB
Relative humidity/RH	5%~95% RH, Non-condensing
Certificate	CE



SOLAR PANEL SPECIFICATIONS

SOLAR PANEL 100W

SPECIFICATIONS

MODEL NO.	SP1-100-2	
RATED MAXIMUM POWER	100W	
VOLTAGE AT PMAX(VMP)	20.5V	
CURRENT AT PMAX(IMP)	4.88A	
OPEN-CIRCUIT VOLTAGE(VOC)	24.19V	
SHORT-CIRCUIT CURRENT(ISC)	5.37A	
UNFOLDED DIMENSION(MM)	1082*570*10	
FOLDED DIMENSION(MM)	570*541*25	
NET WEIGHT(KG)	3	
SUITABLE FOR	EA300, EA500	



SOLAR PANEL 300W

SPECIFICATIONS:

MODEL NO.	SP1-300-4	
RATED MAXIMUM POWER	300W	
VOLTAGE AT PMAX(VMP)	40V	
CURRENT AT PMAX(IMP)	7.5A	
OPEN-CIRCUIT VOLTAGE(VOC)	47.2V	
SHORT-CIRCUIT CURRENT(ISC)	8.25A	
UNFOLDED DIMENSION(MM)	2690*720*5	
FOLDED DIMENSION(MM)	720*600*50	
NET WEIGHT(KG)	14.6	
SUITABLE FOR	EA1000, EA1500, EA2000	



SOLAR PANEL 400W

SPECIFICATIONS:

MODEL NO.	SP1-400-4	SP1-400-4
RATED MAXIMUM POWER	400W	400W
VOLTAGE AT PMAX(VMP)	80V	160V
CURRENT AT PMAX(IMP)	5A	2.5A
OPEN-CIRCUIT VOLTAGE(VOC)	94.4V	188V
SHORT-CIRCUIT CURRENT(ISC)	5.5A	2.55A
UNFOLDED DIMENSION(MM)	2935*822*6	2935*822*6
FOLDED DIMENSION(MM)	822*790*30	822*790*30
NET WEIGHT(KG)	14.8	14.8
SUITABLE FOR	EA3000, EA5000	EE3000, EE5000
Remark	It's better using 4pcs in parallel for EE3000 and EE5000	

CEA Portable Power Station

Application









CEA Mobile Power Bank

Application





CEA Mobile Power Bank


Application





CEA Portable Power Station

Power supply duration of equipment

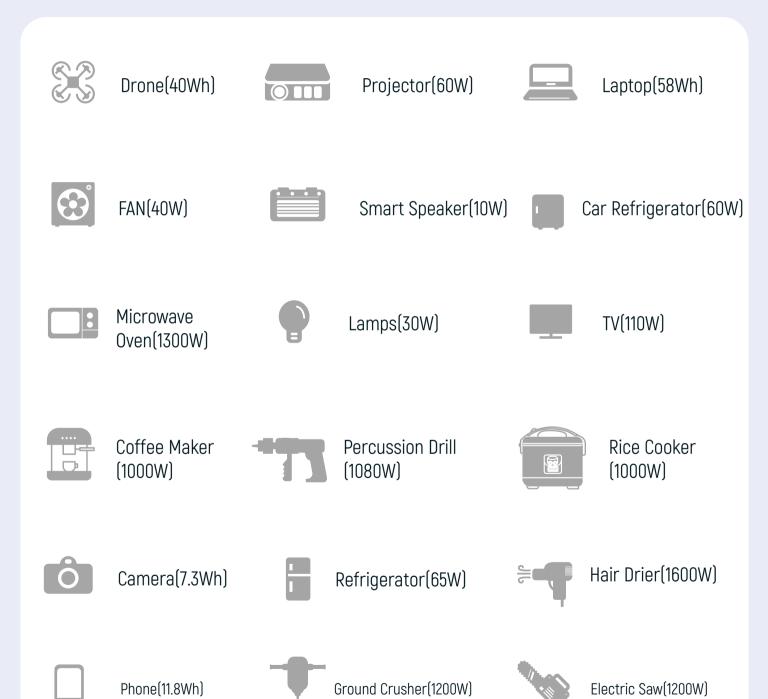

















CEA Mobile Power Station



What is Mobile Power Station?

CEA Mobile Power Station is a reliable battery-powered storage system coming in different sizes and power capacities to meet your needs. With multiple outlets like AC, DC, carport and USB, you can charge all your devices like phones, laptops,

The CEA portable power station is a dependable backup power source that is easy to use and lasts for years with almost no maintenance required. It always has your back and leaves you peace of mind when you're camping, traveling in an RV or experiencing a power outage.



CEA

CEA ELECTRIC CO.,LTD

CHINA ADD: No 6 Yingyang Road, Yingquan Economic Development Zone, Fuyang Anhui China Tel: +86 558 7159989 www.ehpps.com E-mail:anlen@ceaworld.com

